



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification⁶ :

A61M 5/158

A1

(11) International Publication Number:

WO 95/24232

(43) International Publication Date: 14 September 1995 (14.09.95)

(21) International Application Number: PCT/AU95/00119

(22) International Filing Date: 9 March 1995 (09.03.95)

(30) Priority Data:

PM 4327

9 March 1994 (09.03.94)

AU

(71) Applicant (for all designated States except US): NOBLE HOUSE GROUP PTY. (LTD. [AU/AU]; 7 Spensley Place, Wanniasa, ACT 2903 (AU).

(72) Inventors; and

(75) Inventors/Applicants (for US only): DILLON, Jagmohanbir, Singh [AU/AU]; 16 Dashwood Retreat, Bonython, ACT 2905 (AU). MOBBS, William, Leonard [AU/AU]; 7 Spensley Place, Wanniasa, ACT 2903 (AU).

(74) Agents: RAINEY, David, Albert et al.; Thomson Pizzey, Level 2, Woden Plaza Offices, Woden, ACT 2606 (AU).


(81) Designated States: AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MN, MW, MX, NL, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TT, UA, UG, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD, SZ, UG).

Published

With international search report.

Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

(54) Title: PROTECTION ASSEMBLY

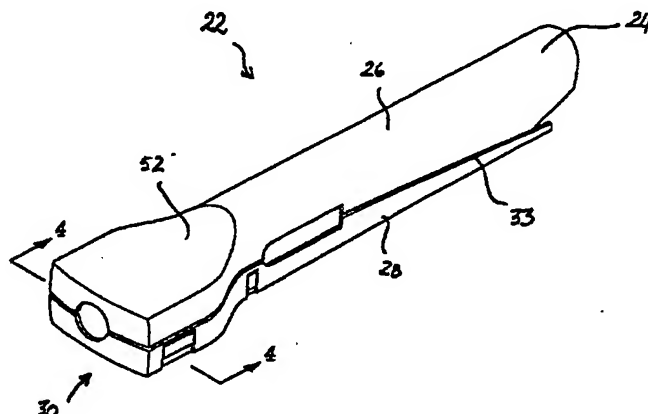

(57) Abstract

A protection assembly (22) for a wing catheter (10) is described, the protection assembly having: a sleeve member (24) adapted to be longitudinally displaced relative to the wing catheter from a needle exposed position to a needle protected position; and fixing means for fixing the sleeve member in the needle protected position, wherein the sleeve member comprises a pair of submembers (26, 28) adapted to be locked together to form the sleeve member, the sub-members defining open-ended slots therebetween for receiving the wing (18, 20) of the wing catheter.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

"PROTECTI N ASSEMBLY"

5 TECHNICAL FIELD

Due to the existence of transmissible diseases such as HIV and Hepatitis, there are concerns regarding the potential of needle-stick injury to medical staff when
10 handling wing catheters.

This invention relates to a protection assembly for protecting against needle-stick injury by a wing catheter.

As used herein, the term "catheter" is used to
15 denote medical and veterinary devices for the purpose of infusing liquids or medication or, alternatively, for drawing off liquid such as, for example, occurs during the donation of blood. Accordingly, the term "catheter" includes within its scope wing needles, cannulas and
20 other like devices for the intravenous, intramuscular or hypodermic injection of a substance into a human or other animal body, or for the removal of a substance (eg. blood) from a human or other animal body.

As used herein the term "wing" is used to denote a
25 protrusion which extends transversely relative to the longitudinal extent of the catheter. Typically, there are a pair of protrusions extending in generally opposite transverse directions from the catheter. Such arrangements are sometimes referred to as "butterfly
30 wings".

BACKGROUND ART

A number of protection assemblies for wing catheters
35 have been proposed. They range from simple slotted cylinders to complex protection assemblies.

Known is a protection assembly for a wing catheter as taught in US Patent 5,112,311 in the name of

Utterberg. In the arrangement illustrated in FIG 15 of this patent, longitudinally extending slots are cut or formed in each of a pair of articulated sub-members in the form of semi-cylindrical shells. The protection
5 assembly must be assembled on the catheter during manufacture, or at least prior to use, with the wings of the catheter being carefully extended through the respective slots as the semi-cylindrical shells are folded together.

10 Also known is a protection assembly according to the teaching of Australian Patent 650317 in the name of Becton. In this arrangement, a pair of sub-members of the protection assembly are folded or fixed together to create a pair of longitudinally extending closed slots.
15 As with the teaching of Utterberg, the protection assembly must be located on the wing catheter during manufacture, or at least prior to use of the wing catheter.

20 DISCLOSURE OF THE INVENTION

This invention in one aspect resides broadly in a protection assembly for a wing catheter, the protection assembly including:-

25 a sleeve member adapted to be longitudinally displaced relative to the wing catheter from a needle exposed position to a needle protected position; and

fixing means for fixing the sleeve member in the needle protected position,

30 wherein the sleeve member comprises a pair of sub-members adapted to be locked together to form the sleeve member, the sub-members defining open-ended slots therebetween for receiving the wing of the wing catheter.

The sub-members may be separate and adapted to fit
35 together by clip-locking or snap-acting fasteners. However it is preferred that the sub-members are articulated by hinge means extending along a portion of a common longitudinal edge. The hinge means can be affixed

to each sub-member. Alternatively and preferably, the hinge means is integral with the sub-members.

Preferably also, the fixing means is a profile in at least one longitudinal edge of at least one sub-member, 5 the profile adapted to retain the wing of the wing catheter in the needle protected position. In a preferred embodiment both longitudinal edges of both sub-members are profiled. Alternatively, the fixing means may include deformable plugs, ramps or engagement means 10 peripherally disposed about the interior of the sleeve member and adapted to be non-releasably engaged by corresponding means associated with the needle. The fixing means may include a plurality of resilient spines adapted to engage with corresponding spines associated 15 with the needle to allow movement of the sleeve member to a position enclosing the point of the needle but to prevent movement of the sleeve member away from this position.

In a preferred embodiment, the sub-members include 20 primary locking means opposite the hinge means. The sub-members may include secondary locking means at a position longitudinally spaced from the primary locking means to resist transverse spreading of the sub-members and resultant widening of the open-ended slots. In a 25 preferred embodiment the locking means are located proximate opposed longitudinal edges of the sub-members. The locking means can include a variety of suitable forms. For example, the locking means can be a contact adhesive. In a preferred embodiment the locking 30 means includes deformable plug means proximate one of the opposed longitudinal edges and receiving means proximate the other edge for non-releasably receiving the deformable plug means. Alternatively again, the locking means can be a circlip adapted to snap about a portion of 35 the periphery of the sleeve member. In another preferred embodiment the locking means is constituted by a snap action hinge operable between an open position in which the articulated sub-members are positioned apart for

pivotal movement relative to one another and a closed position in which the sub-members are positioned together and pivotal movement relative to one another is prevented.

5 Advantageously, the sleeve member can be assembled on the tube of the wing catheter whilst the catheter is in use.

10 The sub-members can take a variety of shapes and forms. They could for example be substantially planar and hinged together to form a square, rectangular, hexagonal or other shaped tubing and in such an arrangement are adapted to conform with a needle mounting or support assembly which is correspondingly shaped. However, it is preferred that the sub-members are
15 substantially semi-cylindrical shells and are articulated to each other by hinge means having an axis substantially parallel to the longitudinal axis of the sleeve member.

20 In a preferred embodiment, one sub-member includes a generally planar surface for abutting the patient in use, and the other sub-member includes a scalloped surface for facilitating manual displacement of the protection assembly relative to the wing catheter from the needle exposed position to the needle protected position. Preferably, the scalloped surface is adapted to receive
25 transversely extending adhesive tape in use adhered to the patient and locating the protection assembly relative to the patient. With this arrangement the patient can conveniently displace the wing catheter to the needle protected position with a single hand, thereby leaving
30 the other hand free to apply pressure to the puncture wound. For example, in a situation where the catheter is inserted in the patient's left arm, the patient can grasp the tubing with the left hand and can pull whilst the protection assembly is fixed relative to the patient by
35 virtue of the adhesive tape. Hence the catheter is withdrawn and immediately protected by the protection assembly and the right hand is free to apply pressure to the puncture wound.

In another aspect this invention resides broadly in a wing catheter assembly including a protection assembly as defined in any one of the above statements.

5 In a further aspect this invention resides broadly in a blood collection bag or an intravenous infusion set including a wing catheter assembly as defined above.

In yet another aspect this invention resides broadly in a method of protection against needle stick injury by a wing catheter, the method including:-

10 locking the sub-members of a protection assembly as defined above together about the tube of a wing catheter to constitute the sleeve member;

sliding the protection assembly forward relative to the wing catheter such that the wings of the wing
15 catheter enter the open-ended slots of the protection assembly; and

sliding the protection assembly further forward and fixing the sleeve member relative to the wing catheter.

20 BRIEF DESCRIPTION OF THE FIGURES

In order that this invention may be more easily understood and put into practical effect, reference will now be made to the accompanying drawings which illustrate
25 a preferred embodiment of the invention, wherein:-

FIG 1 is an illustration of a conventional wing catheter;

FIG 2 is a perspective view of a protection assembly in accordance with the invention;

30 FIG 3 is a plan view of the protection assembly of FIG 2 in open configuration; and

FIG 4 is a sectional elevation through the annular support end of the protection assembly of FIG 2 in closed configuration.

35

BEST MODE

As can be seen in FIG 1, wing catheter 10 has a

needle 12, a needle support 14, and a plastic tube 16 for the infusion or withdrawal of substances through the needle.

5 A pair of butterfly wings 18 and 20 are provided on needle support 14 for abutment against the skin of a patient when wing catheter 10 is in use. Adhesive tape may be positioned across the wings 18 and 20 and adhered to the skin of the patient to hold wing catheter 10 steady.

10 A protection assembly 22 in accordance with the present invention is illustrated in FIG 2.

Protection assembly 22 includes a generally cylindrical sleeve member 24. Sleeve member 24 has upper and lower generally semi-cylindrical shell-like sub-
15 members 26 and 28 joined together at annular support end 30 by a longitudinally extending integral hinge means 32. Longitudinally extending open-ended slots 33 are adapted to receive wings 18, 20 of the wing catheter.

Upper sub-member 26 has a pair of opposed
20 longitudinally extending edges 34 and 36, and lower sub-member 28 has a pair of opposed longitudinally extending edges 38 and 40. Longitudinally extending open-ended slots 33 are defined between longitudinally extending edges 34, 38, and 36, 40, respectively, when in the
25 closed configuration.

Edges 34 and 38 meet to form hinge means 32 at annular support end 30. Opposed edges 36 and 40 are adapted to be locked together by primary locking means in the form of tab 42 and tab receiver 44. The opposed
30 edges 36 and 40 are also adapted to be locked together by secondary locking means in the form of tab 46 and tab receiver 48. The secondary locking means prevent excessive transverse spreading of the sub-members and resultant widening of slots 33 defined between the sub-
35 members.

The opposed sub-members 26 and 28 are of unequal length to facilitate the inclination of the catheter and protection assembly when a needle is being removed from a

patient.

As can be seen in FIG 4, annular support end 30 has two halves which are hinged by integral hinge 32. The halves may be closed by locking together edges 36 and 40 to form the generally cylindrical sleeve member illustrated in FIG 2.

Tab 42 is resilient and has a chamfered or barbed end which is received within a matching tab receiver 44 and retained therein so as not to permit retraction. The secondary locking means are of similar construction.

Lower sub-member 28 includes a generally planar surface 50 for abutting the patient in use, and upper sub-member 26 includes a scalloped surface 52 for facilitating manual displacement of protection assembly 22 relative to wing catheter 10 from the needle exposed position to the needle protected position. Scalloped surface 52 is adapted to receive transversely extending adhesive tape in use adhered to the patient and locating protection assembly 22 relative to the patient. Scalloped surface 52 is shaped to facilitate manual displacement of the protection assembly with a thumb or the like.

The protector can be made from a range of suitable materials which are preferably durable and resilient. Plastics is a suitable material, but the protector can also be made from a suitable metal.

In use, the protection assembly in accordance with the invention is placed over the plastic tubing of the wing catheter. This can be done when the wing catheter is about to be used or conveniently when the wing catheter is about to be removed from a patient. The two sub-members are squeezed together to lock them together. If desired protection assembly 22 can be fixed relative to the patient with adhesive tape. In that case, protection assembly 22 is fixed whilst wing catheter 10 is withdrawn from the patient into protection assembly 10. Alternatively, protection assembly 22 is pushed forward over the needle point of the wing catheter as it

is withdrawn from the patient. This results in the sleeve member locking over the needle point thereby providing protection against needle stick injury. Alternatively, the wing catheter may have been provided with a protection assembly in accordance with the invention during manufacture, the protection assembly having been placed about the plastic tubing and the sub-members locked together during manufacture of the wing catheter.

It will be realised that the protection assembly in accordance with the invention has a number advantages. It provides useful alternatives in manufacturing processes such that the sleeve member can be located on the wing catheter after manufacture of the wing catheter. Conveniently, the protection assembly can be assembled on the tubing immediately prior to withdrawal of the wing catheter from the patient. The protection assembly can be single handedly deployed thereby freeing the other hand of the patient to apply pressure to the puncture wound. The protection assembly affords protection against needle stick injury from wing catheters such as are employed with blood collection bags and intravenous infusion sets. Protection against needle stick injury is afforded not only to users and patients, but also to waste disposal operators.



It will of course be realised that whilst the above has been given by way of an illustrative example of this invention, all such and other modifications and variations hereto, as would be apparent to persons skilled in the art, are deemed to fall within the broad scope and ambit of this invention as is hereinafter claimed.

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:-

1. A protection assembly for a wing catheter, the protection assembly including:-
 - 5 a sleeve member adapted to be longitudinally displaced relative to the wing catheter from a needle exposed position to a needle protected position; and
fixing means for fixing the sleeve member in the needle protected position,
 - 10 wherein the sleeve member comprises a pair of sub-members adapted to be locked together to form the sleeve member, the sub-members defining open-ended slots therebetween for receiving the wing of the wing catheter.
- 15 2. A protection assembly as defined in claim 1, wherein the sub-members are articulated by hinge means extending along a portion of a common longitudinal edge.
- 20 3. A protection assembly as defined in claim 1 or 2, wherein the fixing means is a profile in at least one longitudinal edge of at least one sub-member, the profile adapted to retain the wing of the wing catheter in the needle protected position.
- 25 4. A protection assembly as defined in claim 2, wherein the sub-members include primary locking means opposite the hinge means.
- 30 5. A protection assembly as defined in claim 4, wherein the sub-members include secondary locking means at a position longitudinally spaced from the primary locking means to resist transverse spreading of the sub-members and resultant widening of the open-ended slots.
- 35 6. A protection assembly as defined in claim 1 or 2, wherein the sleeve member can be assembled on the tube of the wing catheter.

7. A protection assembly as defined in claim 1, wherein one sub-member includes a generally planar surface for abutting the patient in use, and the other sub-member includes a scalloped surface for facilitating manual displacement of the protection assembly relative to the wing catheter from the needle exposed position to the needle protected position.
8. A protection assembly as defined in claim 7, wherein the scalloped surface is adapted to receive transversely extending adhesive tape in use adhered to the patient and locating the protection assembly relative to the patient.
9. A wing catheter assembly including a protection assembly as defined in claim 1.
10. A blood collection bag including a wing catheter assembly as defined in claim 9.
11. A method of protection against needle stick injury by a wing catheter, the method including:-
locking the sub-members of a protection assembly as defined in claim 1 together about the tube of a wing catheter to constitute the sleeve member;
sliding the protection assembly forward relative to the wing catheter such that the wings of the wing catheter enter the open-ended slots of the protection assembly; and
sliding the protection assembly further forward and fixing the sleeve member relative to the wing catheter.

1/2

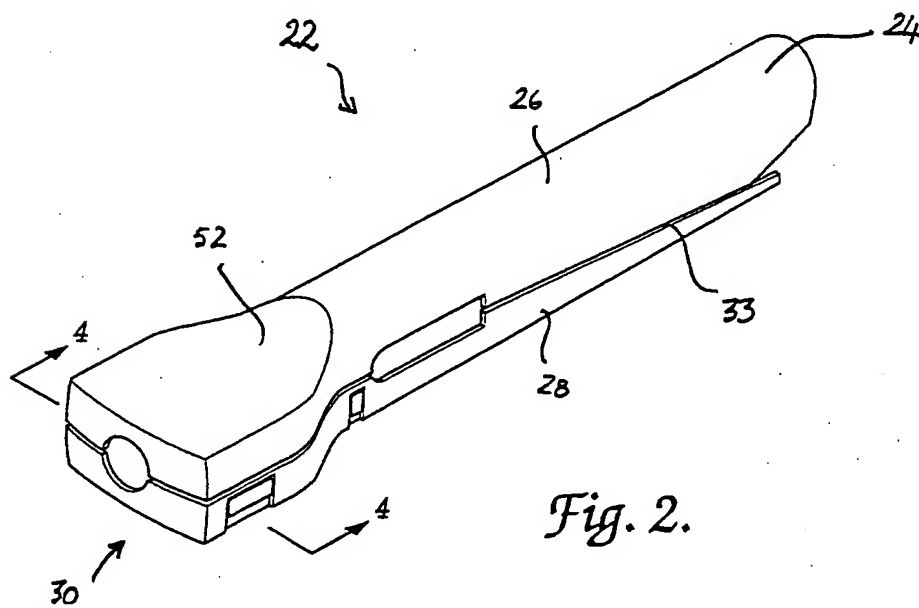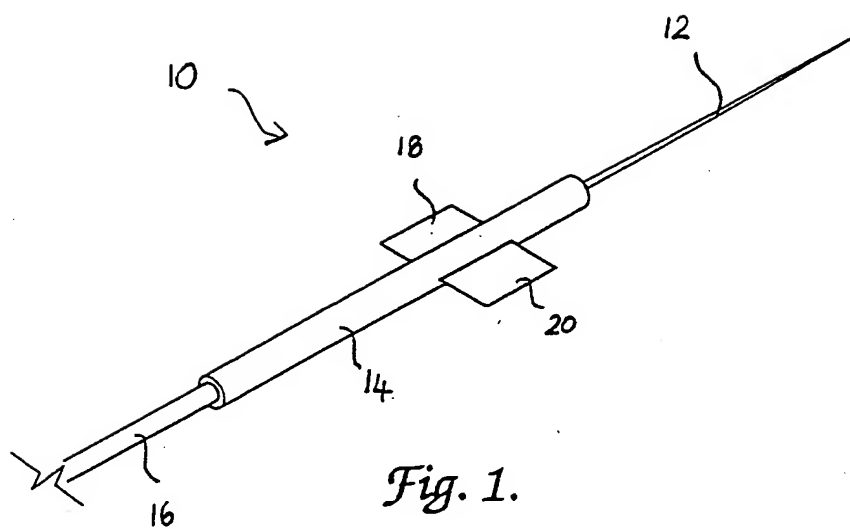

2/2

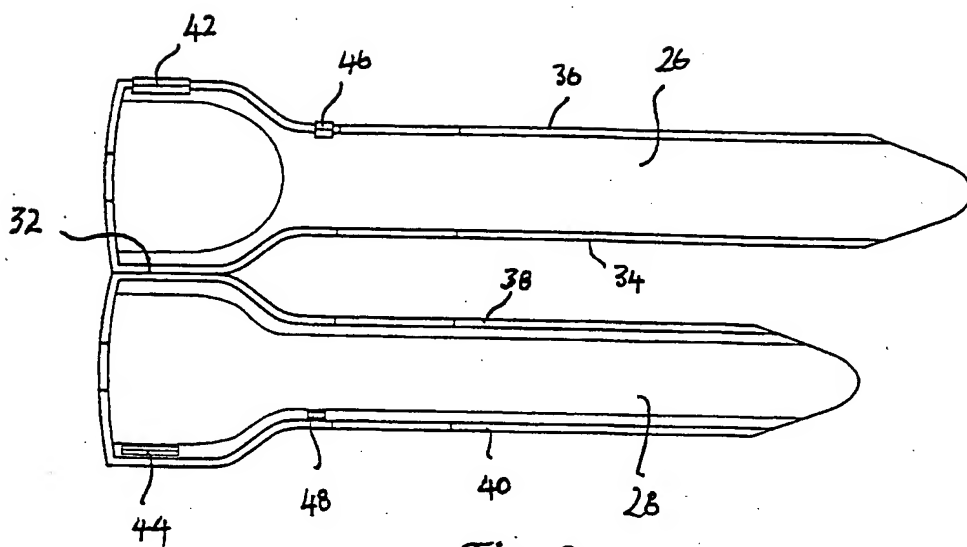


Fig. 3.

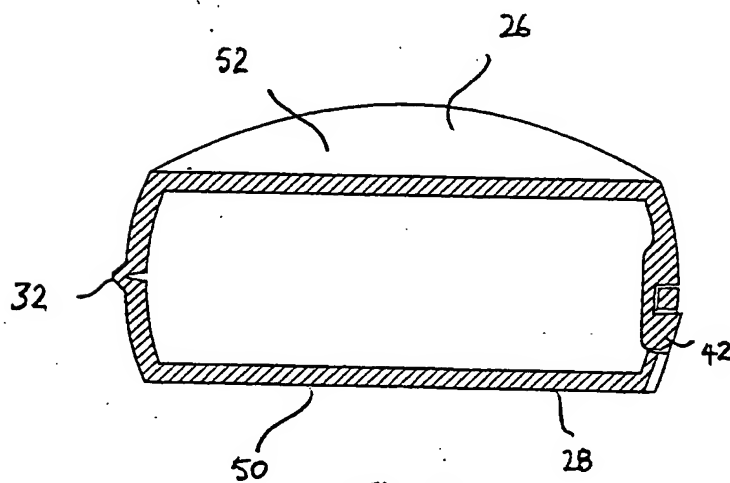



Fig. 4.

INTERNATIONAL SEARCH REPORT

International application No.
PCT/AU 95/00119

A. CLASSIFICATION OF SUBJECT MATTER Int. Cl. ⁶ A61M 5/158 According to International Patent Classification (IPC) or to both national classification and IPC					
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) IPC A61M 5/158, 5/32, 25/00, 25/06 Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched AU:IPC As above Electronic data base consulted during the international search (name of data base, and where practicable, search terms used) DERWENT: (Sheath: or shield: or protect:) and (Wing: and catheter:) or needle: or sleeve: JAPIO: as above					
C. DOCUMENTS CONSIDERED TO BE RELEVANT					
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to Claim No.			
X	WO 90/03196,A, (UTTERBERG) 5 April 1990 Abstract, page 23 line 14 - page 24 line 26, Fig. 15	1-6, 9, 11			
A	AU 13282/92,B, (PRECISION DYNAMICS CORPORATION) 23 July 1992 See entire document	1-11			
A	EP 475857,A, (HOSPAL INDUSTRIE) 18 March 1992 See entire document	1-11			
<div style="display: flex; justify-content: space-between; align-items: center;"> <div style="display: flex; align-items: center;"> <input type="checkbox"/> Further documents are listed in the continuation of Box C. </div> <div style="display: flex; align-items: center;"> <input checked="" type="checkbox"/> See patent family annex. </div> </div>					
<table style="width: 100%; border: none;"> <tr> <td style="width: 33%; vertical-align: top;"> <p>* Special categories of cited documents :</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> </td> <td style="width: 33%; vertical-align: top;"> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&" document member of the same patent family</p> </td> <td style="width: 33%;"></td> </tr> </table>			<p>* Special categories of cited documents :</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p>	<p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&" document member of the same patent family</p>	
<p>* Special categories of cited documents :</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p>	<p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&" document member of the same patent family</p>				
Date of the actual completion of the international search 10 July 1995		Date of mailing of the international search report 14 JULY 1995 (14.07.95)			
Name and mailing address of the ISA/AU AUSTRALIAN INDUSTRIAL PROPERTY ORGANISATION PO BOX 200 WODEN ACT 2606 AUSTRALIA Facsimile No. 06 2853929		Authorized officer <div style="text-align: center;">  LARS KOCH Telephone No. (06) 2832551 </div>			

INTERNATIONAL SEARCH REPORT

International application No.

PCT/AU 95/00119

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate of the relevant passages	Relevant to Claim No.
A	EP 425448,A, (AZZALI) 2 May 1991 See entire document	1-11
A	FR 2263789,A, (TRANSCODAN SVEN HUSTED-ANDERSEN) 10 October 1975 See entire document	1-11

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/AU 95/00119

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document Cited in Search Report		Patent Family Member					
WO	9003196	EP	436646	EP	558162	US	5112311
AU	13282	EP	521145	WO	9211885	US	5382240
EP	475857	FR	2666230				
FR	2263789						
EP	425448	IT	1228524				
							END OF ANNEX